

Free-Standing Wine Dispenser

by *The Glas*

F75 06/08/10/12/14/16

MODELS:

F75 06	6 bottles, width 1130 mm (44,5")	F75 12	12 bottles, width 1730 mm (68,1")
F75 08	8 bottles, width 1330 mm (52,4")	F75 14	14 bottles, width 1930 mm (76,0")
F75 10	10 bottles, width 1530 mm (60,2")	F75 16	16 bottles, width 2180 mm (85,8")



F75 08 – 8 bottle Winedispenser
Black Edition




F75 10 – 10 bottle Winedispenser


SPECIFICATIONS

Refrigeration system shall use R134a refrigerant. Refrigerant flow shall be controlled by an expansion valve. Cabinet shall maintain 42°F to 61°F (6°C to 16°C) temperature with doors closed for storage. Refrigeration system shall be controlled by a pressure control, located near the condensing unit.


Electrical connections shall be 120 volt, 60 cycle, single phase. Unit shall have a 79" (2 m) long electrical cord and NEMA 5-15P plug. Exterior has an ON/OFF switch.

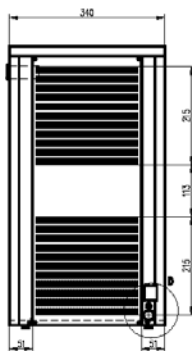

Right Side
(right side compressor)

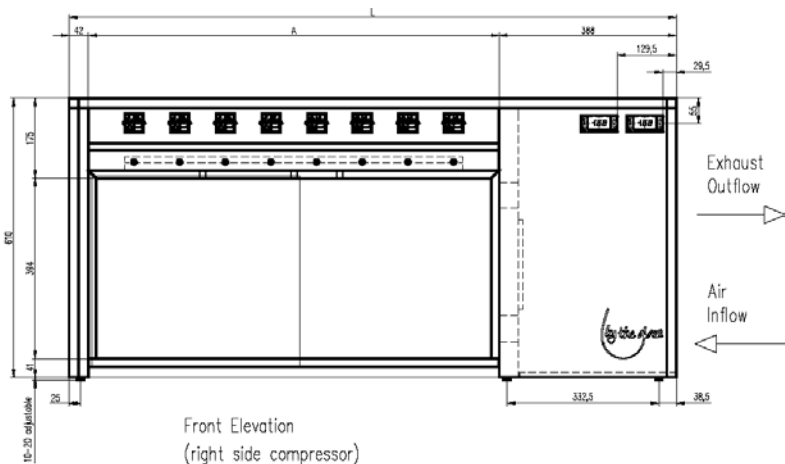


Front Elevation
(right side compressor)



Free-Standing Wine Dispenser

by *The Glas*

F75 06/08/10/12/14/16

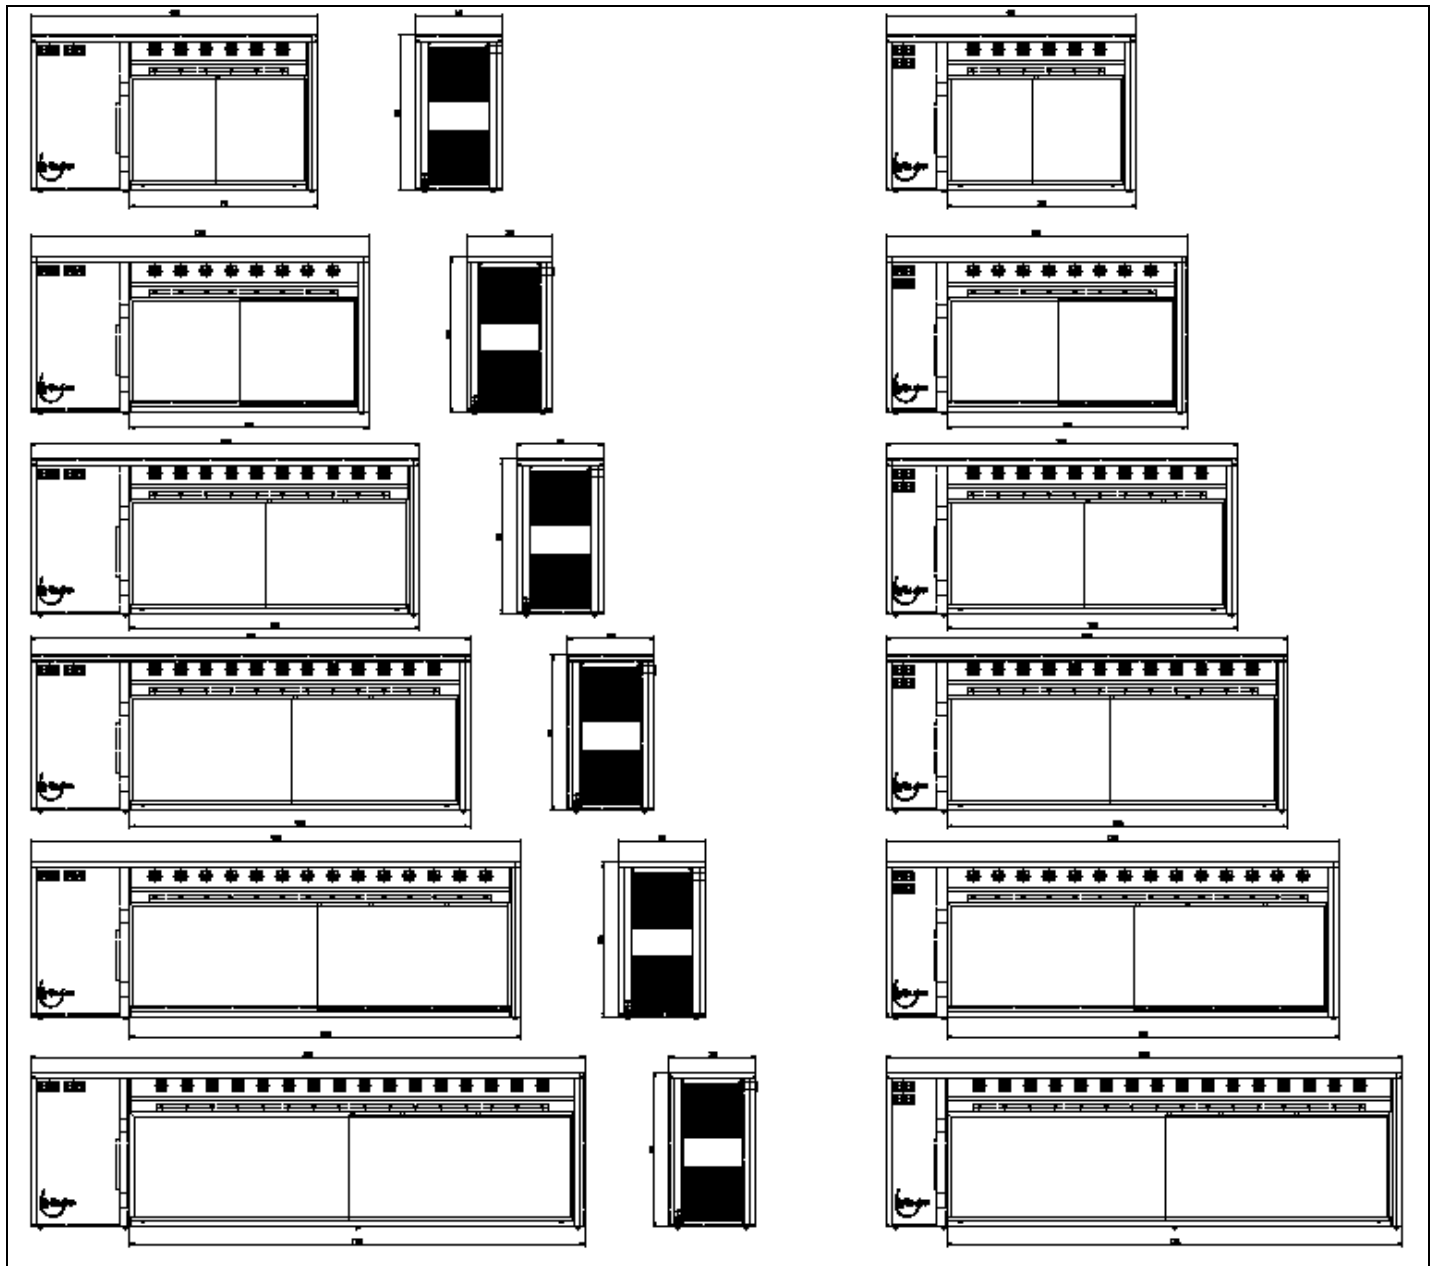

Model	Unit height	Width	Length	Bottles capacity	V/Hz	Ship Weight
F75 06	24.3" (618 mm)	13.4" (340 mm)	44.5" (1130 mm)	6	120/60	165 lbs/75 kg
F75 08	24.3" (618 mm)	13.4" (340 mm)	52.4" (1330 mm)	8	120/60	187 lbs/85 kg
F75 10	24.3" (618 mm)	13.4" (340 mm)	60.2" (1530 mm)	10	120/60	210 lbs/95 kg
F75 12	24.3" (618 mm)	13.4" (340 mm)	68.1" (1730 mm)	12	120/60	232 lbs/105 kg
F75 14	24.3" (618 mm)	13.4" (340 mm)	76.0" (1930 mm)	14	120/60	254 lbs/115 kg
F75 16	24.3" (618 mm)	13.4" (340 mm)	85.8" (2180 mm)	16	120/60	287 lbs/130 kg

Bloemendaalseweg 4-A
2061 CK Bloemendaal
Netherlands

Phone: +31(0) 235 252 289
Fax: +31(0) 235 253 089

www.bytheglass.eu

